




CLM-6061

Metal Ceiling Loudspeaker

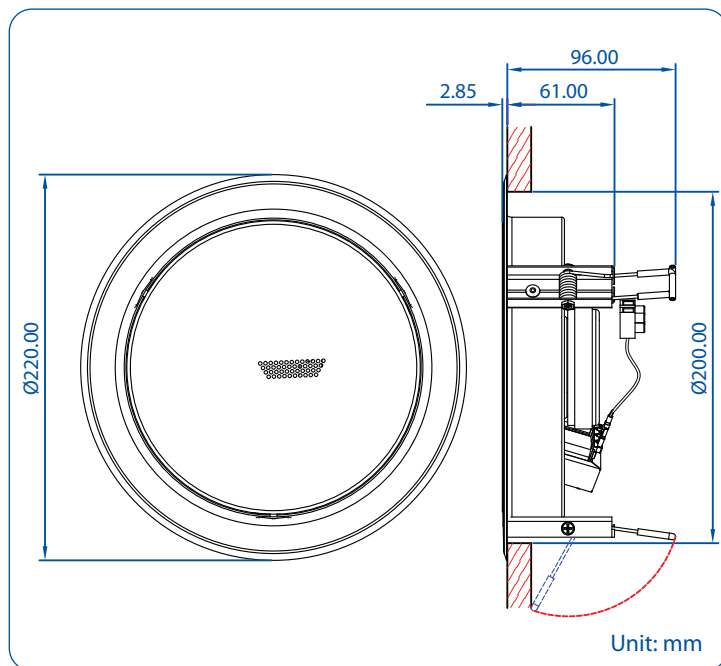

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Protected
- ☒ Withstanding/Insulation Tested

- Low profile grille design.
- Quick spring clips for easy installation.
- Ideal for shallow ceiling voids.
- Fitted with a twin cone driver unit.
- Designed to offer a wide response for music & speech.
- 6 watt transformer with multi tapplings down to 1.5W (100V) & 0.75W (70V).
- Finished in brilliant white (RAL 9010).

Model No.	CLM-6061
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ & 6.67kΩ
Power Taps @ 100V	6W, 3W & 1.5W
Power Taps @ 70V	3W, 1.5W & 0.75W
SPL (1W / 1M)	90dB
Max. SPL (Rated 6W / 1M)	99dB
Frequency Range (-10dB)	85 Hz ~ 20K Hz
Dispersion 1K Hz / 4K Hz	125°/70°
Ambient Temperature	-30°C ~ +60°C
Power Selection	Plug
Material	Baffle: Steel, Grille: Steel
Colour / Finish	White (RAL 9010)
Dimensions	220 (8.66) Dia. X 61 (2.40) Height mm. (in.)
Cutout Size	200 (7.87) Dia. mm. (in.)
Net Weight (ea)	1.20 kgs (2.64 lbs)
Mounting	Quick Spring Clips